



中华人民共和国国家标准


中华人民共和国国家标准

中华人民共和国国家标准




2.1.1. 在1.5~2.5b内。温度应能在 $25 \pm 2^\circ\text{C}$ ~ $65 \pm 2^\circ\text{C}$ 之间上升或下降。

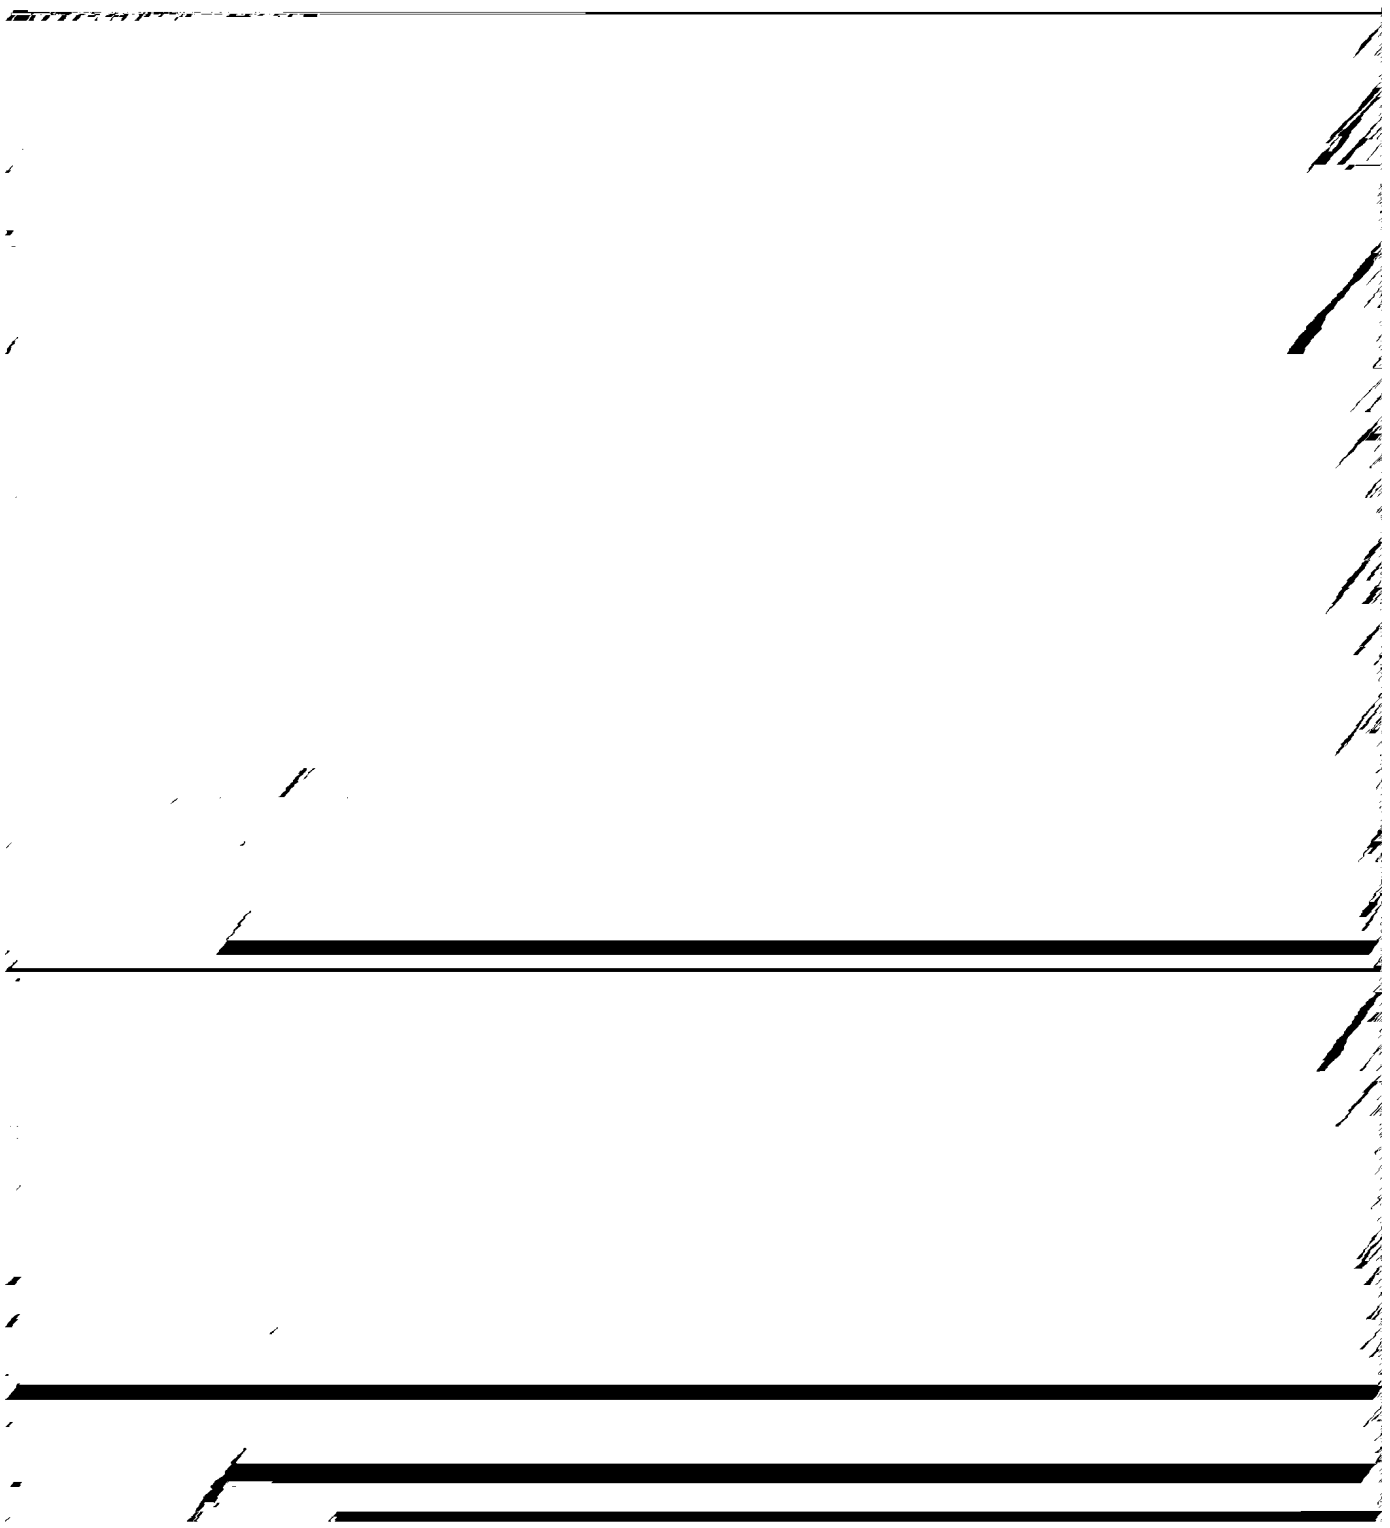

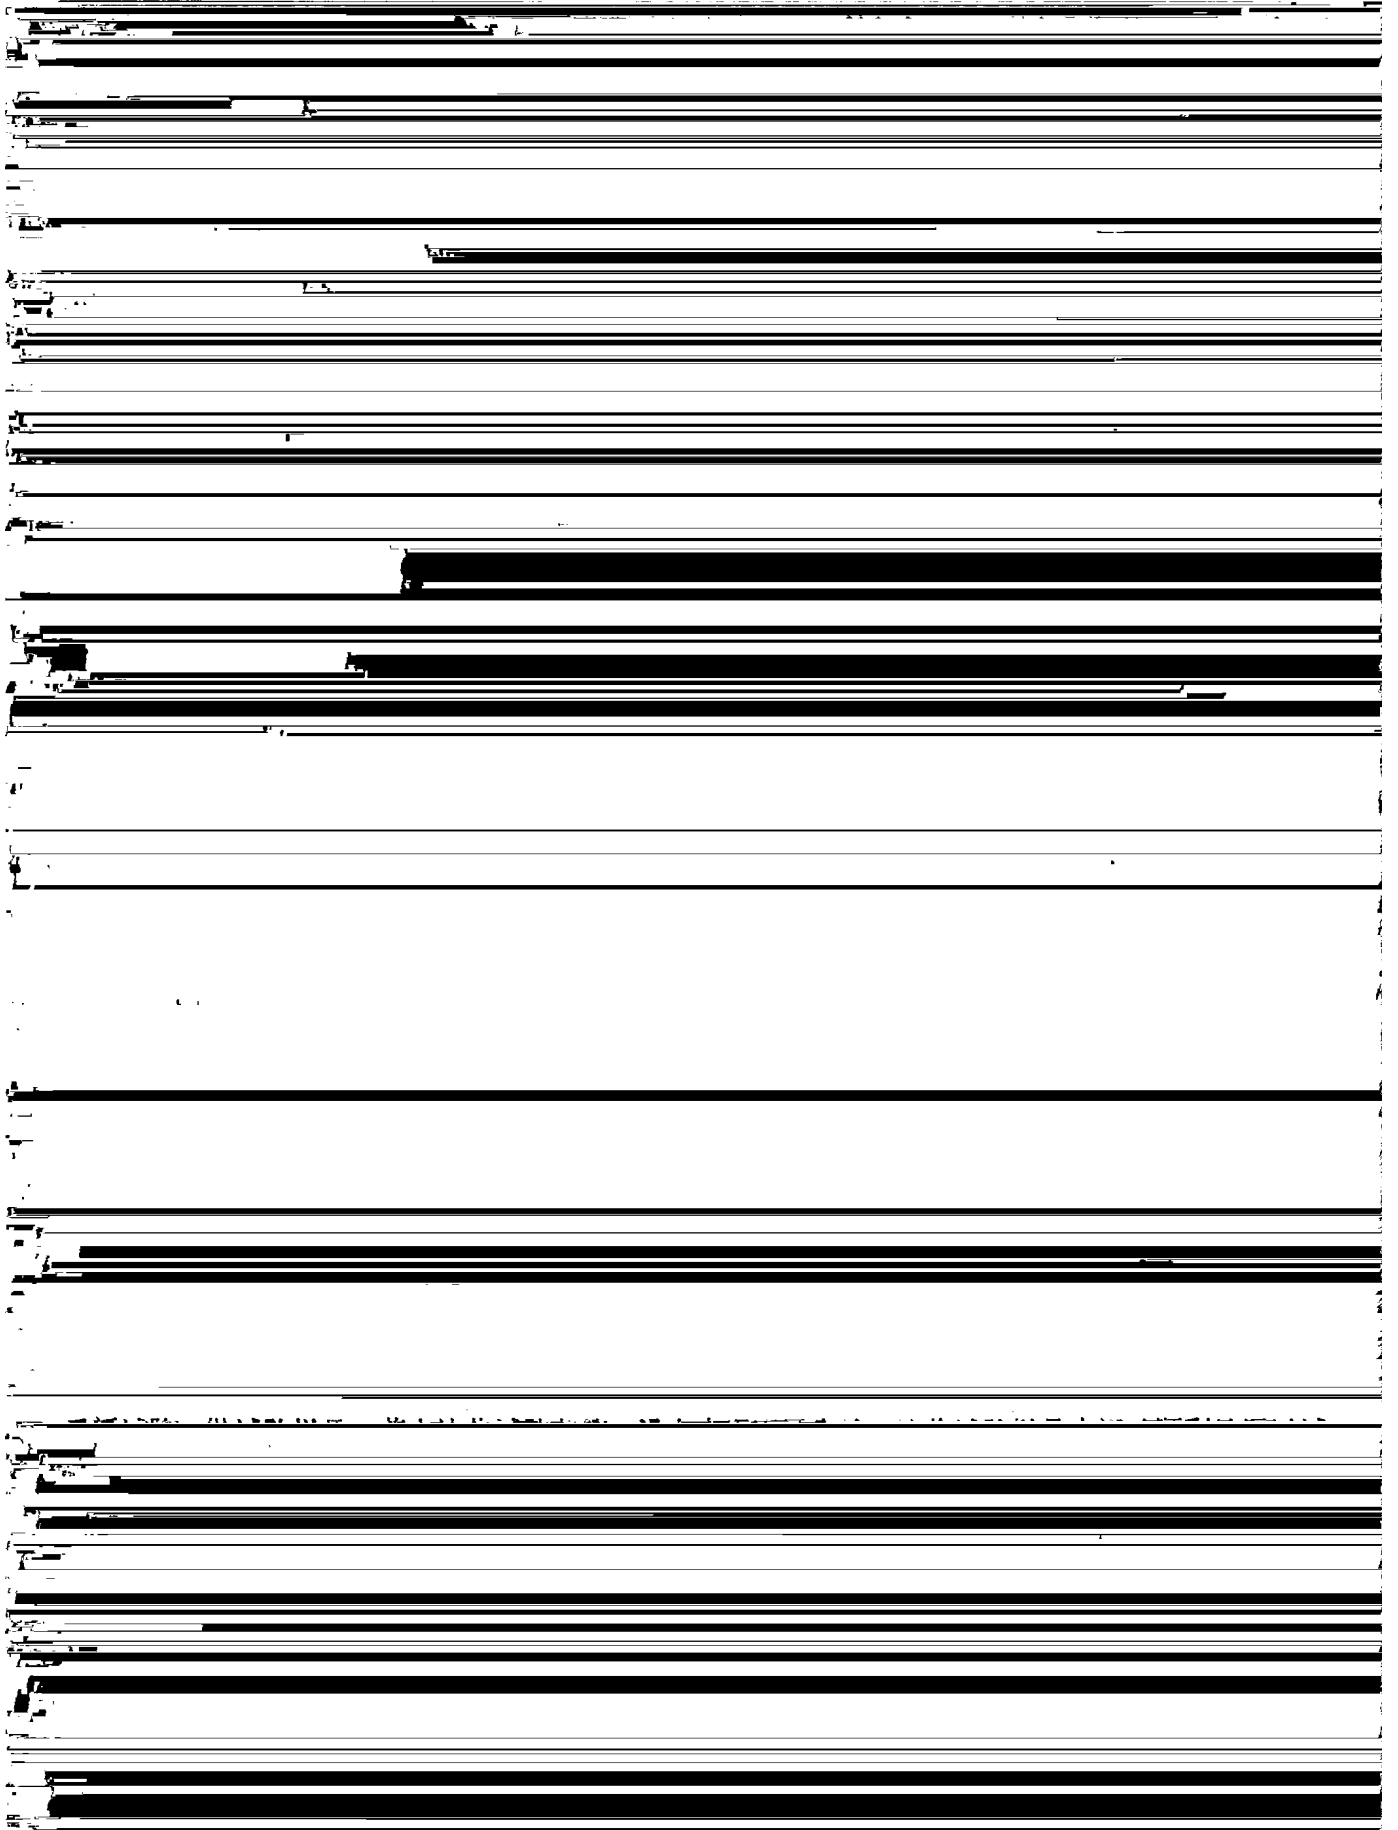

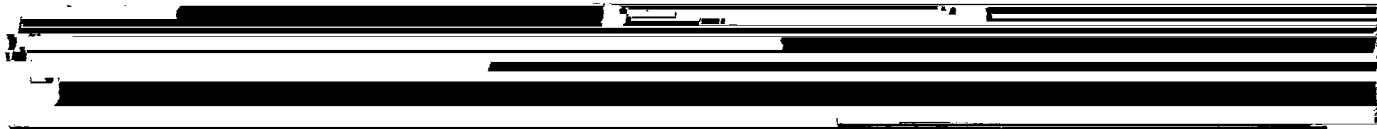

100-
96



[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

GB 2423.34-86

■ 1000h 100%RH 25℃/1000h 100%RH 25℃

■ 1000h 100%RH 25℃/1000h 100%RH 25℃